



PGR200, PGR400 Inspection System Set Up Guide

Inspect your system carefully upon receipt.
Let us know right away of any damage or missing parts.

INCLUDED:

- 1½" color, self-levelling camera head
- CBX17 Monitor/Control Box
- Push rod reel
- Monitor connection (patch) cord
- Removable USB (Flash) Drive
- WiFi Router (Dongle)
- Set of IceBalls: PGR200-3, PGR400-4
- Camera Skid (PGR400 only)


1 Attach camera head to the push rod

Align push rod end and camera head ends together (*right*)

Screw in the camera head into the push rod, putting back pressure on both the push rod and camera head to make solid connection.



2 Mount the CBX17 on the Monitor Mount tray

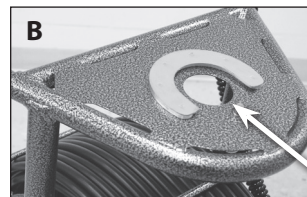


A Pull down the Locking Pin on the underside of the mount and keep it held down as you **B** slide in the Control Box until the disc on the bottom of the case is snug in the "C" bracket on the Monitor Mount.

Release pin to secure the box on the mount.

3 Patch cord from camera reel to the monitor

**** DO NOT power the system on until you do this step**

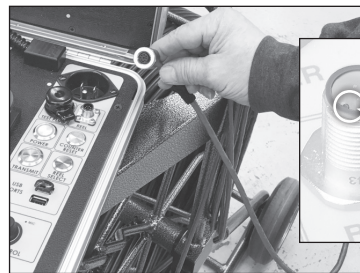

Make sure cord notch hole is properly aligned with the notch on the Control Box port, **DO NOT FORCE THE CONNECTION.** Finger tighten.

4 Plug extension cord in to Control Box port




Brake

- When lever is completely down (as shown), the reel brake is fully engaged
- Lifting it up gradually activates the drag
- The reel spins freely when the lever is in the up position



PGR400

PGR200

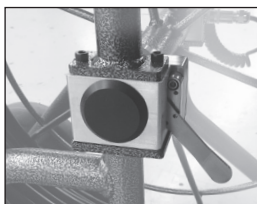

011420

**Manufacturers of Quality
Sewer & Drain Cleaning
Equipment since 1957**

www.MyTana.com

746 Selby Ave • St. Paul MN, 55104
fax: 651.222.1739

1.800.328.8170

Factory Direct Customer Service
M-F 7am - 5pm CST
Competent • Polite • Clear